

# Servo System - AC Servo Motor and Drive

## AC Servo Drive & Motor ASDA-H3

New

3.1 kHz High Response Bandwidth  
27-bit High Resolution Absolute Encoder  
PR Mode for Advanced Motion Command Planning



400 V Single-Axis 4.5 ~ 155 kW | Rated Current 13 ~ 300 A

400 V Dual-Axis 0.75 ~ 20 kW | Rated Current 3.1 ~ 40 A




### Space-Saving

- ASDA-H3 (Single-Axis 7.5 kW × 6)

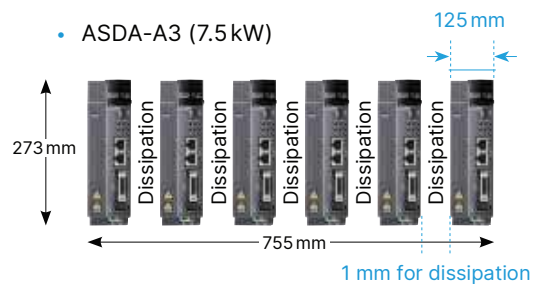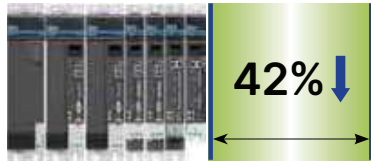


### Single-Axis/Dual-Axis Drive Module

#### Single-Axis




#### Dual-Axis

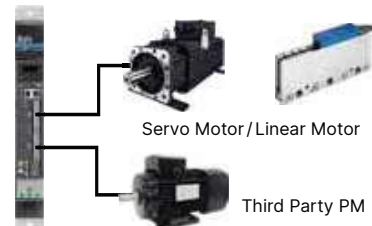

### High Energy Efficiency

Common DC bus transfers the regenerative energy into power

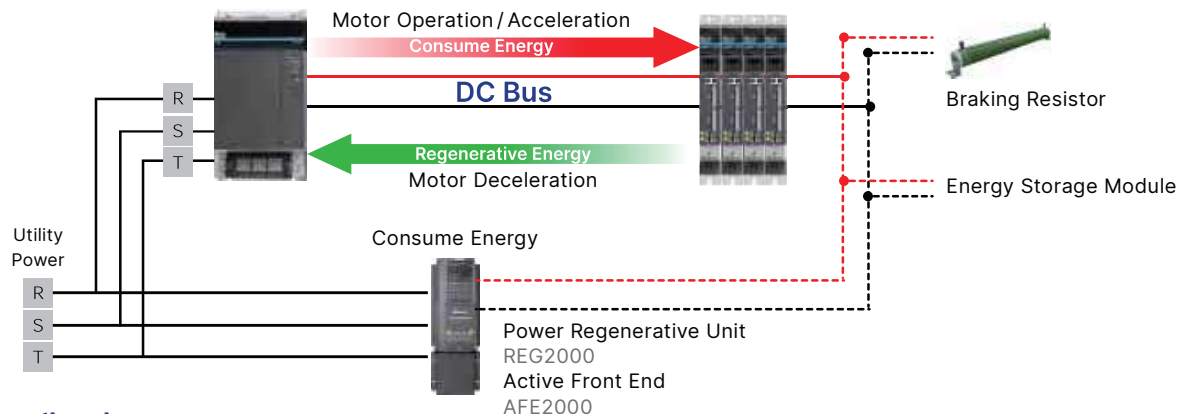

### Applications

Metal processing, Rubber & plastics, Multi-wire cutting, Carton cutting